


DHB-MF132 (210mm Cell)

645-670 Watt

MONOFACIAL MODULE

Industry-leading Warranty based on nominal power

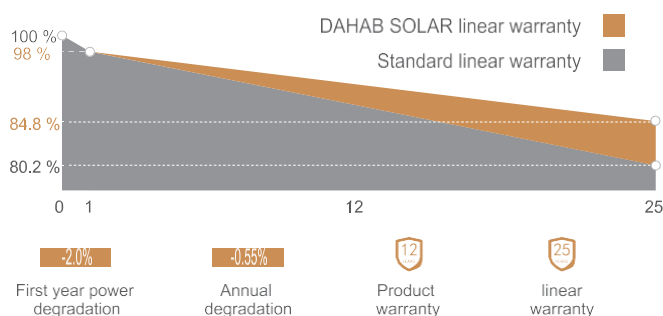

Features



DAHAB SOLAR Multi busbar technology

Multi busbar technology for maximum light capturing and minimum hotspot, shading and resistive losses



Zero micro-cracks

zero micro-cracks guaranteed due to fully automated production lines and comprehensive EL testing



High module conversion efficiency

Module efficiency up to 21.6% achieved through advanced cell technology and manufacturing process



Extended wind and snow load tests

Module certified to withstand extreme wind (3800 Pascal) and snow loads (5400 Pascal) *



Excellent weak light performance

More power output in weak light condition, such as cloudy, morning and sunset



Lower operating temperature

Lower operating temperature and temperature coefficient increases the power output



DAHAB SOLAR current sorting process

Up to 2 % power loss caused by current mismatch could be diminished by current sorting technique to maximize system power output




Withstanding harsh environment

Reliable quality leads to a better sustainability even in harsh environment like desert, farm and coastline



MECHANICAL SPECIFICATIONS

Cell Type	Monocrystalline
Cell Dimensions	210*210mm
Cell Arrangement	132 (6*22)
Weight	34.5kg (76.06lbs.)
Module Dimensions	2384*1303*35mm (93.86*51.30*1.38inches)
Cable Length	Portrait 300mm/Landscape 1200mm/Customized
Cable Cross Section Size	TUV: 4mm ² (0.006inches ²)/UL: 12AWG
Front Glass	3.2mm (0.13inches) AR Coating Tempered Glass
No. of Bypass Diodes	3/6
Packing Configuration (1)	31pcs/carton, 558pcs/40hq
Frame	Anodized Aluminium Alloy
Junction Box	IP68

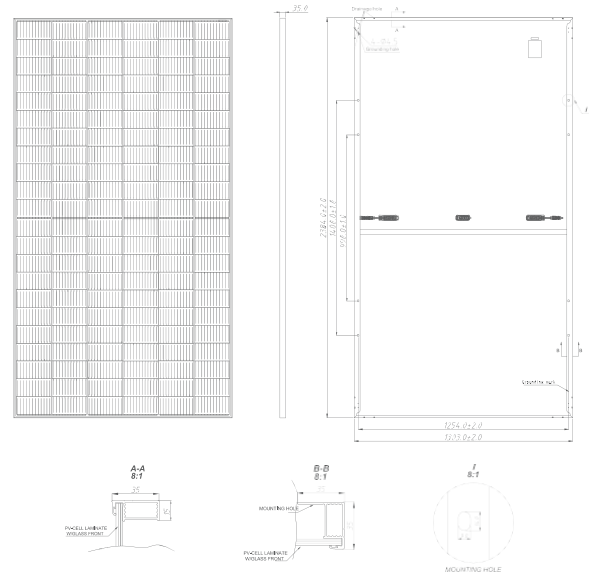

ELECTRICAL SPECIFICATIONS

Module Type	DHB-MF132-645		DHB-MF132-650		DHB-MF132-655		DHB-MF132-660		DHB-MF132-665		DHB-MF132-670	
Testing Condition	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT
Rated output (Pmp/Wp)	645	479	650	483	655	486	660	490	665	494	670	498
Maximum Power Voltage(Vmpp/V)	37.6	35.1	37.8	35.3	38.0	35.5	38.2	35.7	38.4	35.9	38.6	36.1
Maximum Power Current(Imp/A)	17.16	13.63	17.20	13.67	17.24	13.70	17.28	13.74	17.32	13.77	17.36	13.80
Open Circuit Voltage(Voc/V)	45.0	42.4	45.2	42.6	45.4	42.8	45.6	43.0	45.8	43.2	46.0	43.4
Short Circuit Current(Isc/A)	18.22	14.65	18.26	14.68	18.30	14.71	18.34	14.74	18.38	14.78	18.42	14.81
Module efficiency(%)	20.8%		20.9%		21.1%		21.3%		21.4%		21.6%	
Power Tolerance (W)	0~+5		0~+5		0~+5		0~+5		0~+5		0~+5	

STC: Irradiance 1000W/m², Cell Temperature 25°C, Air Mass AM1.5 NMOT: Irradiance at 800W/m², Ambient Temperature 20°C, Air Mass AM1.5, Wind Speed 1m/s

MAXIMUM RATINGS

Maximum System Voltage	1000V/1500V DC (IEC)
Operating Temperature	-40°C ~ +85°C
Maximum Series Fuse	30A
Static Loading	Snow Loading: 5400Pa/ Wind Loading: 2400Pa
Conductivity at Ground	≤0.1Ω
Safety Class	II
Resistance	≥100MΩ
Connector	T01/LJQ-3-CSY/MC4/MC4-EVO2

TEMPERATURE CHARACTERISTICS

NMOT Temperature	43°C±2°C
Temperature Coefficient (Pmax)	-0.36%/°C
Temperature Coefficient (Voc)	-0.26%/°C
Temperature Coefficient (Isc)	0.043%/°C

CURVE & TEMPERATURE DEPENDENCE

